

# MARINE GENSET GUIDE

# MARIN PRO

## ONLINE MARINE GENSET CONFIGURATOR

### Save time, money, and nerves

#### Easy to use and ready within a few clicks.

Choose your configuration and instantly download a complete technical documentation and quote for your next 70–2000 kWe auxiliary engine or genset. It's simple, fast and completely free – no matter if you are building or designing a new vessel or looking for a documentation of your existing engines.

Access now on [www.powerhouse.se/MarinPro](http://www.powerhouse.se/MarinPro)



## CONTENTS

WHO WE ARE	4
WHAT WE OFFER	5
GENSETS	6
CONTACT US	41

## MARINE GENSET GUIDE

Model	Power Range (kWe)	Power Range (kVA)	Page
<a href="#">D5AT</a>	62-75	78-94	8
<a href="#">D5ATA</a>	70-93	88-116	10
<a href="#">D7AT</a>	90-114	88-143	12
<a href="#">D7ATA</a>	108-139	135-174	14
<a href="#">D9MG</a>	136-250	170-313	16
<a href="#">D13MG EPA</a>	248-343	310-429	18
<a href="#">D13MG EPA</a>	300-380	375-475	20
<a href="#">D13MG</a>	248-343	310-429	22
<a href="#">D13MG</a>	300-380	375-475	24
<a href="#">D16MG</a>	332-477	415-596	26
<a href="#">PHS6R</a>	503-603	653-754	28
<a href="#">PHS6R2</a>	476-612	595-765	30
<a href="#">PHS12A2</a>	662-790	828-988	32
<a href="#">PHS12R</a>	785-1223	981-1529	34
<a href="#">PHS16R</a>	1070-1633	1309-2041	36
<a href="#">PHS16R2</a>	1457-1886	1821-2358	38

# WHO WE ARE

Sweden based Power House is your one-stop-shop partner for marine and industrial power solutions – from auxiliary engines and gensets to spare parts and after-sales services.

We officially represent Mitsubishi original products represented by MTEE B.V. and AB Volvo Penta Sweden and thus only offer reliable and recognized brands that meet your demands on global after-sales support, quality and reliability.

Because of our own and our supplier's dealer network we are able to provide also local support, commissioning and warranty services worldwide.

Count on us for high quality products and fast, reliable service and support.

# WHAT WE OFFER

Our product and service portfolio consists of the following:

- Marine auxiliary gensets
- Marine auxiliary engines
- LNG marine auxiliary solutions
- Marine propulsion engines
- Industrial engines
- Marine and industrial generators
- Sensors, switches and other miscellaneous equipment connected to our main products
- Spare parts and exchange products
- Commissioning and after-sales services

In addition to the standard configurations of gensets and auxiliary engines, we also offer customizations (e.g. gauges, air shut-offs, designated control systems, etc.) and consolidated deliveries (loose delivered equipment, e.g. battery boxes, power packs, etc.).

With regards to the sales and service support of marine and industrial engines and marine gensets, Power House conforms to and holds an ISO 9001 and ISO 14001 certificate, as attested by Bureau Veritas.



**STAMFORD**

**VOLVO  
PENTA**

## VOLVO PENTA GENSETS

Volvo Penta gensets combine a compact design with good service accessibility, and are all equipped with Volvo Penta's control and monitoring system, MCC. They are available with a power range of 56 to 478 kW and with three different cooling systems (keel cooled, heat exchanged or radiator cooled). Each genset is designed and built according to the rules of all major classification societies.

### Main Power Supply

All power ratings published are expressed in conformity with Prime Power ratings corresponding to ISO Standard Power for continuous operation. This relates to the supplying of electrical power at variable load with 60-80% load factor. A 10% overload capability is available with this rating.

## DIESEL ELECTRIC PROPULSION

Application type: Vessels operating with marine gensets for power to electric propulsion systems. Engine can be run for an unlimited number of running hours at a load factor of <80% of published Prime Power, 110% capability is available for a maximum of 1 hour per 12 hours operation for this rating. Ratings correspond to ISO Standard Power for continuous operation.

## POWER HOUSE GENSETS


### Main Power Supply

Typical Operation: Average load factor is 60–80% of rated power for continuous operation. Momentary overload: 110% is available for governing purpose.

## DIESEL ELECTRIC PROPULSION

Typical Operation: Average load factor is 60–80% of rated power. Operating hours are 3000–6000 hours per year. Momentary overload: 110% is available for maximum 25 hours per year on emergency basis. 100% of rated power is available for maximum of 3 hours per every 12 hours operation period. Typical Vessel Application: Offshore vessels, inland cargo vessels and ferries.

# VOLVO PENTA D5AT



## COMMERCIAL RATING

Engine Speed	Frequency	Engine Power
1500 RPM	50 Hz	77 kWm
1800 RPM	60 Hz	81 kWm

## GENERAL DATA

D5A T, Volvo Penta, Stamford generator.  
4-cylinder, 4 cycle, water cooled, diesel engine.  
Turbocharged, IMO2 emission certificate.

Bore x Stroke (mm): 108 x 130  
Displacement (L): 4,76

### POWER AT 1500 RPM, 50HZ, 400V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
UCM274C	62	78	222
UCM274D	70	88	222
UCM274E	71	89	222
<b>KEEL COOLED</b>			
UCM274C	62	78	222
UCM274D	70	88	222
UCM274E	71	89	222
<b>RADIATOR COOLED</b>			
UCM274C	62	78	222
UCM274D	67	84	222
UCM274E	67	84	222

\*Fuel consumption; Unit: g/kWh

Available in:

380/400/415/440/690 V

### POWER AT 1800 RPM, 60Hz, 440V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
UCM274C	74	93	222
UCM274D	74	93	222
UCM274E	75	94	222
<b>KEEL COOLED</b>			
UCM274C	74	93	222
UCM274D	74	93	222
UCM274E	75	94	222
<b>RADIATOR COOLED</b>			
UCM274C	68	85	222
UCM274D	68	85	222
UCM274E	69	85	222

\*Fuel consumption; Unit: g/kWh

Available in:


416/440/460/480/600 V



## PRODUCT DIMENSIONS & DRY WEIGHT

L (mm):	1812 - 2261
W (mm):	1046
H (mm):	1614 - 1631
Dry weight (kg):	1175 - 1381

# VOLVO PENTA D5A TA



## COMMERCIAL RATING

Engine Speed	Frequency	Engine Power
1500 RPM	50 Hz	92 kWm
1800 RPM	60 Hz	100 kWm

## GENERAL DATA

D5A TA, Volvo Penta, Stamford generator.  
4-cylinder, 4 cycle, water cooled, diesel engine.  
Turbocharged with air cooler, IMO2 emission certificate.

Bore x Stroke (mm): 108 x 130  
Displacement (L): 4,76

### POWER AT 1500 RPM, 50Hz, 400V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
UCM274D	70	88	208
UCM274E	86	108	208
<b>KEEL COOLED</b>			
UCM274D	70	88	208
UCM274E	86	108	208

\*Fuel consumption; Unit: g/kWh


**Available in:**  
**380/400/415/440/690 V**

### POWER AT 1800 RPM, 60Hz, 440V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
UCM274D	88	110	206
UCM274E	93	116	206
<b>KEEL COOLED</b>			
UCM274D	88	110	206
UCM274E	93	116	206

\*Fuel consumption; Unit: g/kWh


**Available in:**  
**416/440/460/480/600 V**

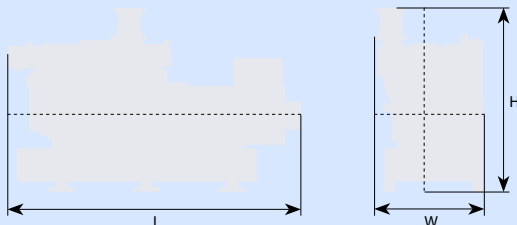

## PRODUCT DIMENSIONS & DRY WEIGHT

L (mm):	1812 - 1925
W (mm):	1046
H (mm):	1614
Dry weight (kg):	1225 - 1310

# VOLVO PENTA D7A T



## COMMERCIAL RATING

Engine Speed	Frequency	Engine Power
1500 RPM	50 Hz	116 kWm
1800 RPM	60 Hz	122 kWm

## GENERAL DATA

D7A T, Volvo Penta, Stamford generator.  
6-cylinder, 4 cycle, water cooled, diesel engine.  
Turbocharged, IMO2 emission certificate.

Bore x Stroke (mm): 108 x 130  
Displacement (L): 7,15

### POWER AT 1500 RPM, 50Hz, 400V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
UCM274E	90	113	216
UCM274F	108	135	218
UCM274G	108	135	219
<b>KEEL COOLED</b>			
UCM274E	90	113	216
UCM274F	108	135	218
UCM274G	108	135	219
<b>RADIATOR COOLED</b>			
UCM274D	70	88	215
UCM274E	90	113	216
UCM274F	104	130	218
UCM274G	104	130	219

\*Fuel consumption; Unit: g/kWh


**Available in:**  
380/400/415/440/690 V

### POWER AT 1800 RPM, 60Hz, 440V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
UCM274E	105	131	216
UCM274F	114	143	216
UCM274G	113	141	215
<b>KEEL COOLED</b>			
UCM274E	105	131	216
UCM274F	114	143	216
UCM274G	113	141	215
<b>RADIATOR COOLED</b>			
UCM274D	88	110	216
UCM274E	105	131	216
UCM274F	107	134	216
UCM274G	107	134	215

\*Fuel consumption; Unit: g/kWh


**Available in:**  
416/440/460/480/600 V

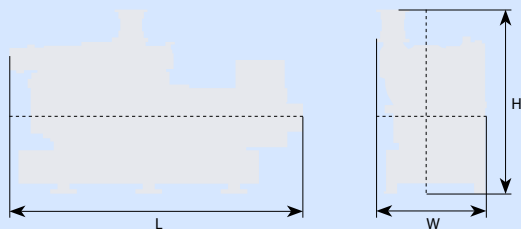

## PRODUCT DIMENSIONS & DRY WEIGHT

L (mm):	2191 - 2575
W (mm):	1157
H (mm):	1614 - 1631
Dry weight (kg):	1465 - 1670

# VOLVO PENTA D7A TA

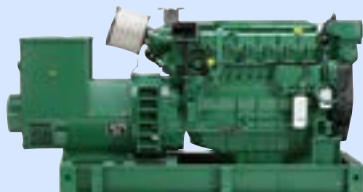

## COMMERCIAL RATING

Engine Speed	Frequency	Engine Power
1500 RPM	50 Hz	139 kWm
1800 RPM	60 Hz	148 kWm

## GENERAL DATA

D7A TA, Volvo Penta, Stamford generator.  
6-cylinder, 4 cycle, water cooled, diesel engine.  
Turbocharged with air cooler, IMO2 emission certificate.

Bore x Stroke (mm): 108 x 130  
Displacement (L): 7,15

### POWER AT 1500 RPM, 50Hz, 400V

	kWe	kVA	Fuel cons.†
<b>HEAT EXCHANGED</b>			
UCM274F	108	135	207
UCM274G	119	149	207
UCM274H	130	163	207
<b>KEEL COOLED</b>			
UCM274F	108	135	207
UCM274G	119	149	207
UCM274H	130	163	207

\*Fuel consumption; Unit: g/kWh


**Available in:**  
**380/400/415/440/690 V**

### POWER AT 1800 RPM, 60Hz, 440V

	kWe	kVA	Fuel cons.†
<b>HEAT EXCHANGED</b>			
UCM274F	125	156	208
UCM274G	137	171	207
UCM274H	139	174	206
<b>KEEL COOLED</b>			
UCM274F	125	156	208
UCM274G	137	171	207
UCM274H	139	174	206

\*Fuel consumption; Unit: g/kWh

**Available in:**  
**416/440/460/480/600 V**

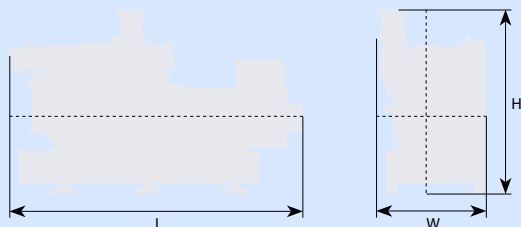


## PRODUCT DIMENSIONS & DRY WEIGHT

L (mm):	2191 - 2239
W (mm):	1157
H (mm):	1614
Dry weight (kg):	1540 - 1660



# VOLVO PENTA D9MG

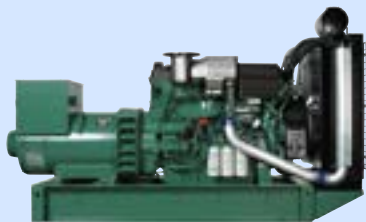

## COMMERCIAL RATING

Engine Speed	Frequency	Engine Power
1500 RPM	50 Hz	239 kWm
1800 RPM	60 Hz	265 kWm

## GENERAL DATA

D9MG, Volvo Penta, Stamford generator.

6-cylinder, 4 cycle, water cooled, diesel engine.

Turbocharged with air cooler, IMO2 emission certificate.

Bore x Stroke (mm): 120 x 138

Displacement (L): 9,36

## POWER AT 1500 RPM, 50Hz, 400V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
HCM434C	168	210	206
HCM434D	184	230	205
HCM434E	220	275	205
HCM434F	225	281	206
<b>KEEL COOLED</b>			
HCM434C	168	210	206
HCM434D	184	230	205
HCM434E	220	275	205
HCM434F	225	281	204
<b>RADIATOR COOLED</b>			
HCM434H	136	170	206
HCM434C	168	210	205
HCM434D	184	230	205
HCM434E	214	268	204

Available in:  
380/400/415/440/690 V

\*Fuel consumption; Unit: g/kWh

## POWER AT 1800 RPM, 60Hz, 440V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
HCM434C	196	245	209
HCM434D	216	270	207
HCM434E	250	313	207
<b>KEEL COOLED</b>			
HCM434C	196	245	209
HCM434D	216	270	207
HCM434E	250	313	207
<b>RADIATOR COOLED</b>			
HCM434H	170	213	208
HCM434C	196	245	207
HCM434D	216	270	207
HCM434E	230	288	206

\*Fuel consumption; Unit: g/kWh


Available in:  
416/440/460/480/600 V



## PRODUCT DIMENSIONS & DRY WEIGHT

L (mm):	2660 - 2969
W (mm):	1161 - 1175
H (mm):	1919
Dry weight (kg):	2210 - 2790

# VOLVO PENTA D13MG EPA



## COMMERCIAL RATING

Engine Speed	Frequency	Engine Power
1500 RPM	50 Hz	300 kWm
1500 RPM	50 Hz	360 kWm
1800 RPM	60 Hz	360 kWm (next page)
1800 RPM	60 Hz	400 kWm (next page)

## GENERAL DATA

D13MG, Volvo Penta, Stamford generator.  
6-cylinder, 4 cycle, water cooled, diesel engine.  
Turbocharged with air cooler, EPA emission certificate.

Bore x Stroke (mm): 131 x 158  
Displacement (L): 12,78

### POWER AT 1500 RPM, 50Hz, 300kWm, 400V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
HCM434F	248	310	203
HCM534C	284	355	203
HCM534D	285	356	203
<b>KEEL COOLED</b>			
HCM434F	248	310	203
HCM534C	284	355	203
HCM534D	285	356	203
<b>RADIATOR COOLED</b>			
HCM434F	248	310	204
HCM534C	274	343	203
HCM534D	275	343	203

\*Fuel consumption; Unit: g/kWh

Available in:  
380/400/415/440/690 V

### POWER AT 1500 RPM, 50Hz, 360 kWm, 440V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
HCM534C	304	380	202
HCM534D	343	429	202
<b>KEEL COOLED</b>			
HCM534C	304	380	202
HCM534D	343	429	202
<b>RADIATOR COOLED</b>			
HCM534C	304	380	196
HCM534D	332	415	196

\*Fuel consumption; Unit: g/kWh


Available in:  
380/400/416/440/690 V



## PRODUCT DIMENSIONS & DRY WEIGHT

L (mm):	2739 - 3219
W (mm):	1165 - 1174
H (mm):	1811 - 1814
Dry weight (kg):	3030 - 3315

# VOLVO PENTA D13MG EPA



## COMMERCIAL RATING

Engine Speed	Frequency	Engine Power
1500 RPM	50 Hz	300 kWm (previous page)
1500 RPM	50 Hz	360 kWm (previous page)
1800 RPM	60 Hz	360 kWm
1800 RPM	60 Hz	400 kWm

## GENERAL DATA

D13MG, Volvo Penta, Stamford generator.  
6-cylinder, 4 cycle, water cooled, diesel engine.  
Turbocharged with air cooler, EPA emission certificate.

Bore x Stroke (mm): 131 x 158  
Displacement (L): 12,78

### POWER AT 1800 RPM, 60Hz, 360kWm, 440V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
HCM434F	300	375	214
HCM534C	341	426	215
HCM534D	342	428	215
<b>KEEL COOLED</b>			
HCM434F	300	375	214
HCM534C	341	426	215
HCM534D	342	428	215
<b>RADIATOR COOLED</b>			
HCM434F	300	375	204
HCM534C	323	404	216
HCM534D	324	405	216

\*Fuel consumption; Unit: g/kWh


Available in:  
416/440/460/480/600 V

### POWER AT 1500 RPM, 50Hz, 360 kWm, 440V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
HCM534C	360	450	211
HCM534D	380	475	209
<b>KEEL COOLED</b>			
HCM534C	360	450	211
HCM534D	380	475	209
<b>RADIATOR COOLED</b>			
HCM534C	360	450	206
HCM534D	362	453	206

\*Fuel consumption; Unit: g/kWh


Available in:  
416/440/460/480/600 V

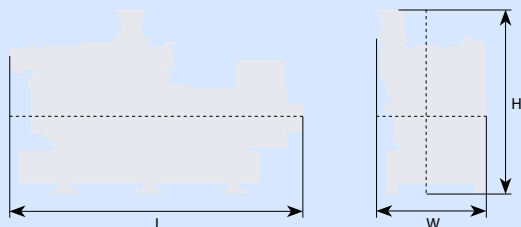

## PRODUCT DIMENSIONS & DRY WEIGHT

L (mm):	2739 - 3219
W (mm):	1165 - 1174
H (mm):	1811 - 1814
Dry weight (kg):	3030 - 3315

# VOLVO PENTA D13MG



## COMMERCIAL RATING

Engine Speed	Frequency	Engine Power
1500 RPM	50 Hz	300 kWm
1500 RPM	50 Hz	360 kWm
1800 RPM	60 Hz	360 kWm (next page)
1800 RPM	60 Hz	400 kWm (next page)

## GENERAL DATA

D13MG, Volvo Penta, Stamford generator.

6-cylinder, 4 cycle, water cooled, diesel engine.

Turbocharged with air cooler, IMO2 emission certificate.

Bore x Stroke (mm): 131 x 158

Displacement (L): 12,78

### POWER AT 1500 RPM, 50Hz, 300kWm, 400V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
HCM434F	248	310	194
HCM534C	284	355	194
HCM534D	285	356	194
<b>KEEL COOLED</b>			
HCM434F	248	310	194
HCM534C	284	355	194
HCM534D	285	356	194
<b>RADIATOR COOLED</b>			
HCM434F	248	310	194
HCM534C	274	343	194
HCM534D	275	344	194

\*Fuel consumption; Unit: g/kWh

Available in:

380/400/415/440/690 V


### POWER AT 1500 RPM, 50Hz, 360 kWm, 440V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
HCM534C	304	380	190
HCM534D	343	429	191
<b>KEEL COOLED</b>			
HCM534C	304	380	190
HCM534D	343	429	191
<b>RADIATOR COOLED</b>			
HCM534C	304	380	191
HCM534D	332	415	191

\*Fuel consumption; Unit: g/kWh

Available in:


380/400/415/440/690 V

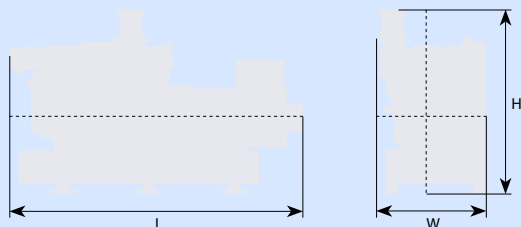

## PRODUCT DIMENSIONS & DRY WEIGHT

L (mm):	2739 - 3219
W (mm):	1165 - 1174
H (mm):	1811 - 1814
Dry weight (kg):	3030 - 3315

# VOLVO PENTA D13MG



## COMMERCIAL RATING

Engine Speed	Frequency	Engine Power
1500 RPM	50 Hz	300 kWm (previous page)
1500 RPM	50 Hz	360 kWm (previous page)
1800 RPM	60 Hz	360 kWm
1800 RPM	60 Hz	400 kWm

## GENERAL DATA

D13MG, Volvo Penta, Stamford generator.

6-cylinder, 4 cycle, water cooled, diesel engine.

Turbocharged with air cooler, IMO2 emission certificate.

Bore x Stroke (mm): 131 x 158

Displacement (L): 12,78

### POWER AT 1800 RPM, 60Hz, 360kWm, 440V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
HCM434F	300	375	200
HCM534C	341	426	200
HCM534D	342	428	200
<b>KEEL COOLED</b>			
HCM434F	300	375	200
HCM534C	341	426	200
HCM534D	342	428	200
<b>RADIATOR COOLED</b>			
HCM434F	300	375	200
HCM534C	323	404	200
HCM534D	324	405	200

\*Fuel consumption; Unit: g/kWh

Available in:

416/440/460/480/600 V

### POWER AT 1800 RPM, 60Hz, 400 kWm, 440V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
HCM534C	360	450	198
HCM534D	380	475	199
<b>KEEL COOLED</b>			
HCM534C	360	450	198
HCM534D	380	475	199
<b>RADIATOR COOLED</b>			
HCM534C	360	450	199
HCM534D	362	453	199

\*Fuel consumption; Unit: g/kWh

Available in:


416/440/460/480/600 V



## PRODUCT DIMENSIONS & DRY WEIGHT

L (mm):	2739 - 3219
W (mm):	1165 - 1174
H (mm):	1811 - 1814
Dry weight (kg):	3030 - 3315

# VOLVO PENTA D16MG

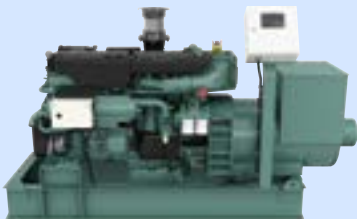

## COMMERCIAL RATING

Engine Speed	Frequency	Engine Power
1500 RPM	50 Hz	450 kWm
1800 RPM	60 Hz	500 kWm

## GENERAL DATA

D16MG, Volvo Penta, Stamford generator.  
6-cylinder, 4 cycle, water cooled, diesel engine.  
turbocharged with air cooler, IMO2 emission certificate.

Bore x Stroke (mm): 144 x 165

Displacement (L): 16,12

### POWER AT 1500 RPM, 50Hz, 400V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
HCM534D	332	415	212
HCM534E	392	490	213
HCM534F	420	525	213
<b>KEEL COOLED</b>			
HCM534D	332	415	212
HCM534E	392	490	213
HCM534F	420	525	213
<b>RADIATOR COOLED</b>			
HCM534D	332	415	212
HCM534E	392	490	213
HCM534F	414	518	213

\*Fuel consumption; Unit: g/kWh

Available in:

380/400/415/440/690 V

### POWER AT 1800 RPM, 60Hz, 440V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
HCM534D	390	488	204
HCM534E	470	588	205
HCM534F	477	596	206
<b>KEEL COOLED</b>			
HCM534D	390	488	204
HCM534E	470	588	205
HCM534F	477	596	206
<b>RADIATOR COOLED</b>			
HCM534D	390	488	204
HCM534E	448	560	205

\*Fuel consumption; Unit: g/kWh

Available in:

416/440/460/480/600 V



## PRODUCT DIMENSIONS & DRY WEIGHT

L (mm):	3090 - 3499
W (mm):	1145 - 1380
H (mm):	1879 - 2046
Dry weight (kg):	3581 - 4100



## COMMERCIAL RATING

Engine Speed	Frequency	Engine Power
1500 RPM	50 Hz	545 kWm
1800 RPM	60 Hz	635 kWm

## GENERAL DATA

PHS6R-Z3MPTAW, Mitsubishi, Stamford generator.  
6-cylinder, 4 cycle, water cooled, diesel engine.  
Turbocharged with air cooler, IMO2 emission certificate.

Bore x Stroke (mm): 170 x 180  
Displacement (L): 24,51

### POWER AT 1500 RPM, 50Hz, 400V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
HCM634H2	522	653	207
<b>KEEL COOLED</b>			
HCM634H2	522	653	207
<b>RADIATOR COOLED</b>			
HCM634H2	503	623	207

### DIESEL ELECTRIC POWER AT 1500 RPM, 50Hz, 400V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
HCM634H2	522	653	207
<b>KEEL COOLED</b>			
HCM634H2	522	653	207

\*Fuel consumption; Unit: g/kWh

**Available in:**  
380/400/415/440/690 V

### POWER AT 1800 RPM, 60Hz, 440V


	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
HCM634G2	603	754	220
<b>KEEL COOLED</b>			
HCM634G2	603	754	220
<b>RADIATOR COOLED</b>			
HCM634G2	577	721	220

### DIESEL ELECTRIC POWER AT 1800 RPM, 60Hz, 440V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
HCM634G2	548	685	n/a
<b>KEEL COOLED</b>			
HCM634G2	548	685	n/a

\*Fuel consumption; Unit: g/kWh

**Available in:**  
416/440/460/480/600 V

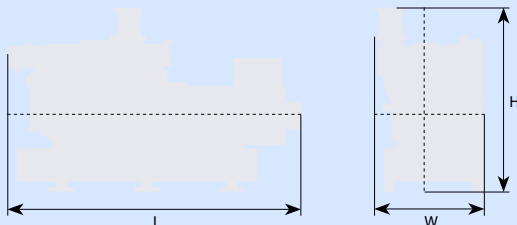

## PRODUCT DIMENSIONS & DRY WEIGHT

L (mm):	3564 - 4575*
W (mm):	1614 - 1752*
H (mm):	1801 - 2448*
Dry weight (kg):	5800

\*May differ due to choice of cooling system and alternator.



## COMMERCIAL RATING

Engine Speed	Frequency	Engine Power
1500 RPM	50 Hz	640 kWm
1200 RPM	60 Hz	500 kWm

## GENERAL DATA

PHS6R2-T2MPTK, Mitsubishi, Stamford generator.  
6-cylinder, 4 cycle, water cooled, diesel engine.  
Turbocharged with air cooler, IMO2 emission certificate.

Bore x Stroke (mm): 170 x 180  
Displacement (L): 29,96

### POWER AT 1500 RPM, 50Hz, 400V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
HCM634H2	612	765	n/a
<b>KEEL COOLED</b>			
HCM634H2	612	765	n/a

### DIESEL ELECTRIC POWER AT 1500 RPM, 50Hz, 400V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
HCM634H2	612	765	n/a
<b>KEEL COOLED</b>			
HCM634H2	612	765	n/a

\*Fuel consumption; Unit: g/kWh

**Available in:**  
**380/400/415/440/690 V**

### POWER AT 1200 RPM, 60Hz, 440V


	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
HCM636K2	476	595	n/a
<b>KEEL COOLED</b>			
HCM636K2	476	595	n/a

### DIESEL ELECTRIC POWER AT 1200 RPM, 60Hz, 440V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
HCM636K2	476	595	n/a
<b>KEEL COOLED</b>			
HCM636K2	476	595	n/a

\*Fuel consumption; Unit: g/kWh

**Available in:**  
**416/440/460/480/600 V**

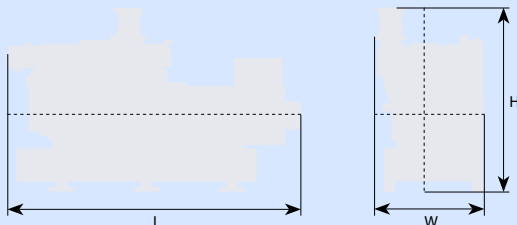

## PRODUCT DIMENSIONS & DRY WEIGHT

L (mm):	3564*
W (mm):	1614*
H (mm):	1881*
Dry weight (kg):	6000

\*May differ due to choice of cooling system and alternator.



# POWER HOUSE PHS12A2



## COMMERCIAL RATING

Engine Speed	Frequency	Engine Power
1500 RPM	50 Hz	709 kWm
1800 RPM	60 Hz	828 kWm

## GENERAL DATA

PHS12A2-MPTAW, Mitsubishi, Stamford generator.  
12-cylinder, 4 cycle, water cooled, diesel engine.  
Turbocharged with air cooler, IMO2 emission certificate.

Bore x Stroke (mm): 150 x 160  
Displacement (L): 33,93

### POWER AT 1500 RPM, 50Hz, 400V

	kWe	kVA	Fuel cons.†
<b>HEAT EXCHANGED</b>			
HCM634J2	678	848	n/a
<b>KEEL COOLED</b>			
HCM634J2	678	848	n/a
<b>RADIATOR COOLED</b>			
HCM634J2	662	828	n/a

### DIESEL ELECTRIC POWER AT 1500 RPM, 50Hz, 400V

	kWe	kVA	Fuel cons.†
<b>HEAT EXCHANGED</b>			
HCM634J2	678	848	n/a
<b>KEEL COOLED</b>			
HCM634J2	678	848	n/a

†Fuel consumption; Unit: g/kWh

**Available in:**  
380/400/415/440/690 V

### POWER AT 1800 RPM, 60Hz, 440V


	kWe	kVA	Fuel cons.†
<b>HEAT EXCHANGED</b>			
HCM634J2	790	988	n/a
<b>KEEL COOLED</b>			
HCM634J2	790	988	n/a
<b>RADIATOR COOLED</b>			
HCM634J2	764	955	n/a

### DIESEL ELECTRIC POWER AT 1800 RPM, 60Hz, 440V

	kWe	kVA	Fuel cons.†
<b>HEAT EXCHANGED</b>			
HCM634J2	718	898	n/a
<b>KEEL COOLED</b>			
HCM634J2	718	898	n/a

†Fuel consumption; Unit: g/kWh

**Available in:**  
416/440/460/480/600 V

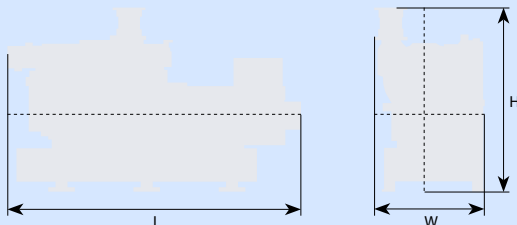

## PRODUCT DIMENSIONS & DRY WEIGHT

L (mm):	3703*
W (mm):	1818*
H (mm):	1934*
Dry weight (kg):	7500

\*May differ due to choice of cooling system and alternator.



## COMMERCIAL RATING

Engine Speed	Frequency	Engine Power
1500 RPM	50 Hz	1120 kWm
1800 RPM	60 Hz	1270 kWm
1200 RPM	60 Hz	840 kWm

## GENERAL DATA

PHS12R-MPTAW, Mitsubishi, Stamford generator.  
12-cylinder, 4 cycle, water cooled, diesel engine.  
Turbocharged with air cooler, IMO2 emission certificate.

Bore x Stroke (mm): 170 x 180  
Displacement (L): 49,03

### POWER AT 1500 RPM, 50Hz, 400V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
PM734E2	1081	1351	n/a
<b>KEEL COOLED</b>			
PM734E2	1081	1351	n/a
<b>RADIATOR COOLED</b>			
PM734E2	1051	1314	n/a

### DIESEL ELECTRIC PROPULSION AT 1500 RPM, 50Hz, 400V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
PM734E2	1081	1351	n/a
<b>KEEL COOLED</b>			
PM734E2	1081	1351	n/a

\*Fuel consumption; Unit: g/kWh

**Available in:**  
**380/400/415/440/690 V**

### POWER AT 1800 RPM, 60Hz, 440V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
PM734E2	1223	1529	n/a
<b>KEEL COOLED</b>			
PM734E2	1223	1529	n/a
<b>RADIATOR COOLED</b>			
PM734E2	1172	1465	n/a

### POWER AT 1200 RPM, 60Hz, 440V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
PM736F2	799	999	n/a
<b>KEEL COOLED</b>			
PM736F2	799	999	n/a
<b>RADIATOR COOLED</b>			
PM736F2	785	981	n/a

### DIESEL ELECTRIC PROPULSION AT 1800 RPM, 60Hz, 440V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
PM734E2	1108	1385	n/a
<b>KEEL COOLED</b>			
PM734E2	1108	1385	n/a

### DIESEL ELECTRIC PROPULSION AT 1200 RPM, 60Hz, 440V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
PM736F2	799	999	n/a
<b>KEEL COOLED</b>			
PM736F2	799	999	n/a


\*Fuel consumption; Unit: g/kWh

**Available in:**  
**416/440/460/480/600 V**

## PRODUCT DIMENSIONS & DRY WEIGHT

L (mm):	4162 - 4220*
W (mm):	1772 - 1832*
H (mm):	2366 - 2379*
Dry weight (kg):	10 300 - 11 300

\*May differ due to choice of cooling system and alternator.

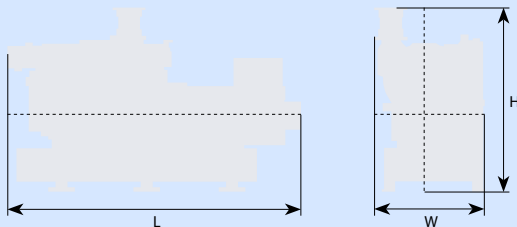



## COMMERCIAL RATING

Engine Speed	Frequency	Engine Power
1500 RPM	50 Hz	1500 kWm
1800 RPM	60 Hz	1690 kWm
1200 RPM	60 Hz	1120 kWm

## GENERAL DATA

PHS16R-MPTAW, Mitsubishi, Stamford generator.  
16-cylinder, 4 cycle, water cooled, diesel engine.  
Turbocharged with air cooler, IMO2 emission certificate.

Bore x Stroke (mm): 170 x 180  
Displacement (L): 65,37

### POWER AT 1500 RPM, 50Hz, 400V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
PM734E2	1437	1796	211
<b>KEEL COOLED</b>			
PM734E2	1437	1796	211
<b>RADIATOR COOLED</b>			
PM734E2	1408	1760	211

### DIESEL ELECTRIC PROPULSION AT 1500 RPM, 50Hz, 400V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
PM734E2	1437	1796	211
<b>KEEL COOLED</b>			
PM734E2	1437	1796	211

\*Fuel consumption; Unit: g/kWh

Available in:

380/400/415/440/690 V

### POWER AT 1800 RPM, 60Hz, 440V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
PM734G2	1633	2041	215
<b>KEEL COOLED</b>			
PM734G2	1633	2041	215
<b>RADIATOR COOLED</b>			
PM734G2	1578	1973	215

### POWER AT 1200 RPM, 60Hz, 440V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
PM736G2	1070	1338	202
<b>KEEL COOLED</b>			
PM736G2	1070	1338	202
<b>RADIATOR COOLED</b>			
PM736G2	1047	1309	202

### DIESEL ELECTRIC PROPULSION AT 1800 RPM, 60Hz, 440V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
PM734G2	1485	1856	n/a
<b>KEEL COOLED</b>			
PM734G2	1485	1856	n/a

### DIESEL ELECTRIC PROPULSION AT 1200 RPM, 60Hz, 440V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
PM736G2	1070	1338	202
<b>KEEL COOLED</b>			
PM736G2	1070	1338	202

\*Fuel consumption; Unit: g/kWh


Available in:

416/440/460/480/600 V

## PRODUCT DIMENSIONS & DRY WEIGHT

L (mm):	4781 - 4821*
W (mm):	1721*
H (mm):	2249*
Dry weight (kg):	15 500

\*May differ due to choice of cooling system and alternator.

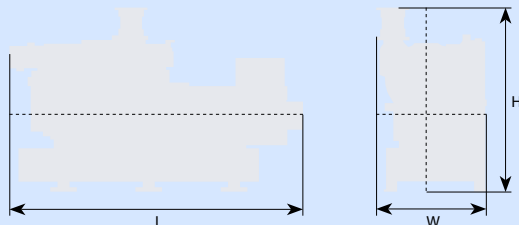

# POWER HOUSE PHS16R2



## COMMERCIAL RATING

Engine Speed	Frequency	Engine Power
1500 RPM	50 Hz	1500 kWm
1800 RPM	60 Hz	1690 kWm
1200 RPM	60 Hz	1120 kWm

## GENERAL DATA

S16R-MPTAW, Mitsubishi, Stamford generator.  
16-cylinder, 4 cycle, water cooled, diesel engine.  
Turbocharged with air cooler, IMO2 emission certificate.

Bore x Stroke (mm): 170 x 180  
Displacement (L): 65,37

### POWER AT 1500 RPM, 50Hz, 400V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
DSG86M1/4W	1886	2358	208
<b>KEEL COOLED</b>			
DSG86M1/4W	1886	2358	208
<b>RADIATOR COOLED</b>			
DSG86M1/4W	1837	2296	208

### DIESEL ELECTRIC PROPULSION AT 1500 RPM, 50Hz, 400V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
DSG86M1/4W	1886	2358	208
<b>KEEL COOLED</b>			
DSG86M1/4W	1886	2358	208

\*Fuel consumption; Unit: g/kWh

Available in:  
380/400/415/440/690 V

### POWER AT 1200 RPM, 60Hz, 440V


	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
DSG86M1/6W	1505	1881	207
<b>KEEL COOLED</b>			
DSG86M1/6W	1505	1881	207
<b>RADIATOR COOLED</b>			
DSG86M1/6W	1457	1821	207

### DIESEL ELECTRIC PROPULSION AT 1200 RPM, 60Hz, 440V

	kWe	kVA	Fuel cons.*
<b>HEAT EXCHANGED</b>			
DSG86M1/6W	1505	1881	207
<b>KEEL COOLED</b>			
DSG86M1/6W	1505	1881	207

\*Fuel consumption; Unit: g/kWh

Available in:  
416/440/460/480/600 V

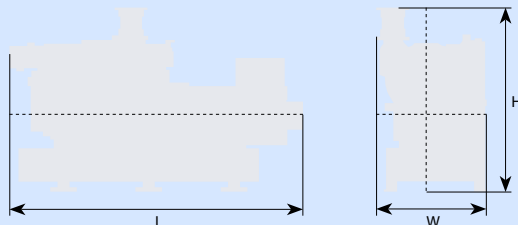

## PRODUCT DIMENSIONS & DRY WEIGHT

L (mm):	4781 - 4821*
W (mm):	1721*
H (mm):	2249*
Dry weight (kg):	15 500

\*May differ due to choice of cooling system and alternator.

# CONTACT US

## **SALES**

Phone: +46 31-762 56 06/01  
sales@powerhouse.se

## **SPARE PARTS**

Phone: +46 31-762 56 03/07  
parts@powerhouse.se

## **SERVICE**

Phone: +46 31-762 56 11  
service@powerhouse.se

## **SWITCHBOARD**

Phone: +46 31-762 56 00  
info@powerhouse.se





ISO 9001  
ISO 14001

**BUREAU VERITAS**  
Certification



**POWER**   
HOUSE