

Data sheet

Exhaust gas temperature sensors

Type MBT 5113 and MBT 5116



Heavy-duty sensors used for measuring exhaust gas from diesel engines, turbines and compressors within stationary and marine applications.

MBT 5113 – based on thermocouple technology for media temperatures up to 800 °C.

MBT 5116 – based on a Pt 100 element technology for standardised signals, high accuracy and media temperature up to 600 °C.

Features

MBT 5113

- Up to 800 °C media temperatures
- B-head for standard installations
- Changeable inserts
- Solid drilled protection tube for high resistance to shock and vibrations

MBT 5116

- Up to 600 °C media temperatures
- 2- or 3 wire connections
- Solid drilled protection tube for high resistance to shock and vibrations
- Available in 2 versions:
- Slim-line for compact installations
- B-head for standard installations
- Changeable insert

Approvals

Lloyds Register of Shipping, LR
 Germanischer Lloyd, GL
 Det Norske Veritas, DNV
 Registro Italiano Navale, RINA

Nippon Kaiji Kyokai, NKK
 American Bureau of Shipping, ABS
 Korean Register of Shipping, KRS
 Bureau Veritas, BV
 China Classification Society, CCS

Technical data

General data MBT 5113

Measuring range	-50 – 800 °C
Sensing element	1 × NiCr-Ni, type K
Protection tube	∅24 / ∅14, AISI 316


Response times

Protection tube	Indicative response times			
	Water 0.2 m/s		Air 1 m/s	
	$t_{0.5}$	$t_{0.9}$	$t_{0.5}$	$t_{0.9}$
∅24 / ∅14	30 s	95 s	200 s	700 s

Mechanical and environmental specifications

Max. temperature	Ambient:	90 °C with 600 °C media temperature
Vibration stability	Shock:	100 g / 6 ms
	Vibrations:	4 g sine function, 2 – 100 Hz , measured according to IEC 60068-2-6
Enclosure	IP65 according to IEC 60529	
Cable entry	Pg 16	

Sensor tolerance EN 60584-2 class 2

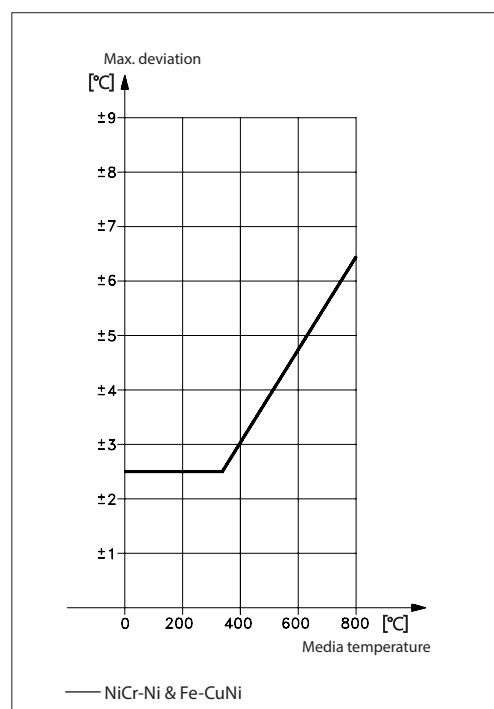


Ordering standard

Type MBT 5113		Sensor			
Connection head B-head (-50 – 800 °C)	B			Tolerance EN 60584-2 Class 2	0
Resistance value 1 x NiCr-Ni, Type K	0			Process connection G ½ A	0
Other	9			G ¾ A	1
				Other	9
Protection Tube ø24 / ø14, Tapered	0				
Other	9				
Extension length				Insertion length	
050 mm	1	080		080 mm	
100 mm	2	100		100 mm	
Other	9	150		150 mm	
		200		200 mm	
		250		250 mm	
		300		300 mm	
		xx0		xx0 mm	

■ Preferred versions

Dimensions
MBT 5113

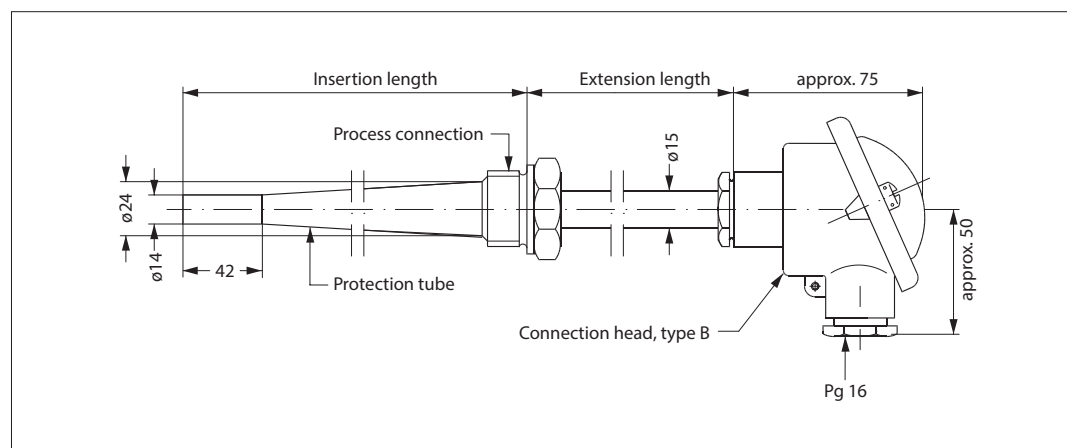

Net weight [kg]

Insertion length [mm]	Process connection	
	G ½"	G ¾"
080	0.48	–
100	0.52	0.60
120	0.56	0.64
150	0.60	0.70
170	–	0.72
200	–	0.76
250	–	0.85
300	–	1.04

**Technical data
MBT 5116**
General data MBT 5116

Measuring range	-50 – 600 °C
Sensing element	Pt 100
Protection tube	ø24 / ø14, AISI 316

Response times

Protection tube	Indicative response times			
	Water 0.2 m/s		Air 1 m/s	
	$t_{0.5}$	$t_{0.9}$	$t_{0.5}$	$t_{0.9}$
ø24 / ø14	30 s	95 s	150 s	450 s

Mechanical and environmental specifications


Max. ambient temperature	Slim-Line:	75 °C with 600 °C media temperature
	B-Head:	90 °C with 600 °C media temperature
Sensor tolerance	EN 60751 Class B: $\pm(0.3 + 0.005 \times t)$ t = temperature of medium, numerical value	
Insulation resistance	Minimum 0.5 M Ohm at 600 °C according to EN60751	
Vibration stability	Shock:	100 g / 6 ms
	Vibrations:	4 g sine function, 2 – 200Hz, measured according to IEC 60068-2-6
Enclosure	IP65 according to IEC 60529	
Cable entry	Slim-Line	Pg 13.5
	B-Head	Pg 16

Material

Slim-Line	Housing	Nickel plated brass
	Union	Nickel plated brass
	Cover	Nickel plated brass
	Spring (internal mounted)	W.no. 1.4568
	Extension length	AISI 316
	Protection tube in contact with media	AISI 316
B-Head	Union	Nickel plated brass
	Connection head	Die cast aluminium
	Extension length	AISI 316
	Protection tube in contact with media	AISI 316

Dimensions


MBT 5116 Slim-line

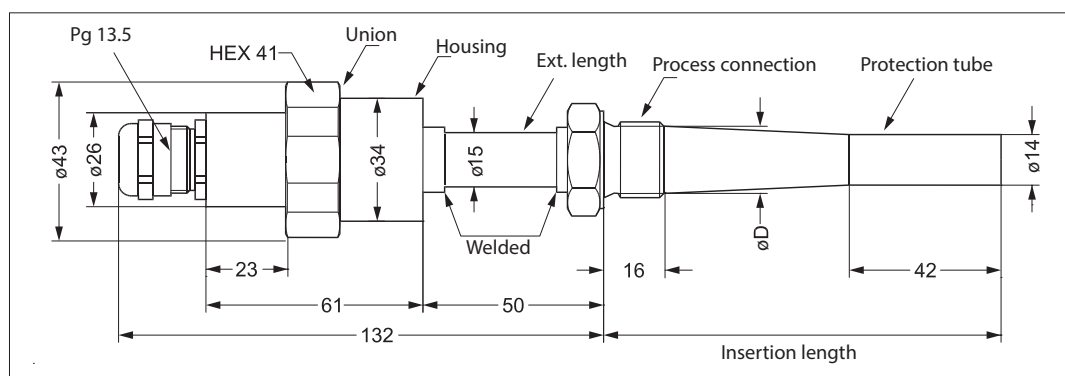

Process connection	G ½ A	G ¾ A
Width across flats	HEX 27	HEX 32
ϕD	18 mm	24 mm

Note:
Tightening torque moment for the union max.: 25 Nm

MBT 5116 B-head

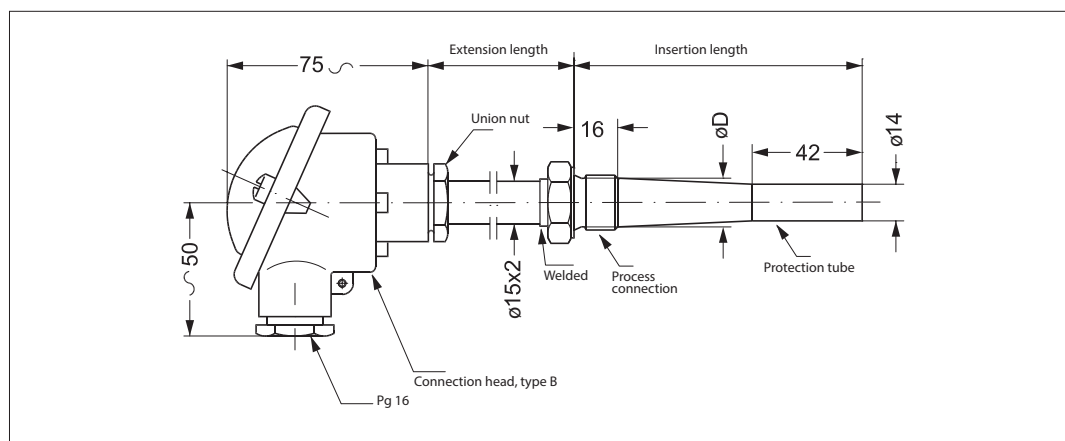

Process connection	G ½ A	G ¾ A
Width across flats	HEX 27	HEX 32
ϕD	18 mm	24 mm

Net Weight [kg]

Insertion length [mm]	Process connection			
	Slim-line		B-head	
	G 1/2"	G 3/4"	G 1/2"	G 3/4"
080	0.43	–	0.48	–
100	0.46	0.52	0.52	0.60
120	0.48	0.57	0.56	0.64
150	0.52	0.64	0.60	0.70
200	–	0.76	–	0.76
250	–	0.89	–	0.85
300	–	0.99	–	1.04